


SPP-C200

2-inch Mobile Receipt Printer

 **ACVENTIS**
Phone: +49 211 4846 398 0
E-Mail: contact@acventis.de

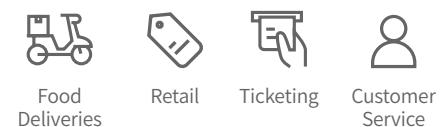

Small and Economical



Long Lasting Field Operation

- Equipped with 3000 mAh Single Cell Battery featuring largest capacity in its class
- Seamless connectivity including USB 2.0 and Bluetooth V5.0 (Classic + LE)
- Low-temp (-15°C) printing supported



User Centered Convenience

- Charging with universal Type-C cable
- Intuitive LED Lighting for printer's status
- Super compact and lightweight design (224 g)
- Media roll diameter of up to 40 mm
- Resistant to multiple drops from 1.5 m (5 ft.)
- IP42 water and dust proof



Outstanding Performance

- Fast print speeds of up to 80 mm/sec
- A broad range of drivers and SDKs across various platforms including iOS, Android, and Windows
- Web / mobile printing software supported

SPP-C200

2-inch Mobile Receipt Printer

 ACVENTIS
Phone: +49 211 4846 398 0
E-Mail: contact@acventis.de



Specifications

Printer Specifications

Print Method

Direct Thermal

Print Speed

Up to 80 mm/sec (Receipt)

Print Resolution

203 dpi

Print Width

Up to 48 mm

Sensor

Paper End

Media Characteristics

Media Type

Receipt

Media Width

58 mm

Media Roll Diameter

Up to 40 mm

Media Thickness

0.07 ± 0.005 mm

Supply Method

Easy Paper Loading

Physical Characteristics

Dimensions (WxDxH)

79.5 x 115.5 x 45 mm
(3.13 x 4.55 x 1.77 inch)

Weight

Including battery: 224 g (0.49 lbs.)

Paper : 57 g (0.13 lbs.)

Electrical

3.6 V Li-ion, 3000 mAh, Rechargeable

Charging time: Up to 3.5 hrs,

EnergyStar Certified,

USB Type-C charging support

Performance Characteristics

Memory

8 MB SDRAM, 4 MB Flash

Interface

Standard: USB V2.0 FS + Bluetooth

Bluetooth: V5.0(Classic / LE)

Environment Characteristics

Temperature

Operating: -15 ~ 50°C (5 ~ 122°F)

Storage: -30 ~ 70°C (-22 ~ 158°F)

Humidity

Operating: 10 ~ 80% RH

Sealing

IP42

Drop Rate

1.5 m (5 ft.)

Software

Emulation

BXL / POS

Driver / Utility

Windows Driver, OPOS / JPOS Driver,
Linux / Mac CUPS Driver, Utility Program

SDK / Plugin

Android / iOS / Windows SDK, Linux SDK,
Xamarin SDK, Cordova Plugin, Web Print SDK

Application

mPrint App (Android, iOS)

Fonts / Graphics / Symbolologies

Character Size

Font A: 12 x 24 Font B: 9 x 17 Font C: 9 x 24

KOR, CHN, JPN: 24 x 24

Characters Per Line

Font A: 32 Font B, C: 42

KOR, CHN, JPN: 16

Character Sets

Alphanumeric: 95

Expanded Graphics: 128 x 33 page

International: 32

Graphics

Supporting user-defined fonts, graphics,
formats, layouts, and logos

Barcode Symbolologies

1D: Codabar, Code 39, Code 93, Code 128, EAN-8,
EAN-13, ITF, UPC-A, UPC-E

2D: Aztec, Data Matrix, GS1 Databar, MaxiCode,
PDF417, QR code

Accessories

Standard

Belt Clip, USB Cable, Battery Pack